

4500/4600/6600 FRONT UNLOAD

HYDRAULIC WET KIT DR PTD PROVIDED BY CUSTOMER



TRUCK HYDRAULIC DRIVE

3000 PSI MAX.
 RELIEF VALVE INSTALLED, SET AT 3000 PSI
 HYDRAULIC PUMP-20-25 GPM
 30 GALLON RESERVOIR WITH OIL
 1/2" NPT FRONT HYDRAULIC CONNECTIONS

TRUCK PTD DRIVE

60-80% OF ENGINE SPEED
 #60 ROLLER CHAIN RECOMMENDED
 JACK SHAFT-60B16 SPRCKET
 45/4600 DRIVE 60B30 1-1/4" BORE, 1/4" KEYWAY


Select truck with axle, frame and horsepower configuration that match box capacities. Always follow federal, state and local laws for lighting, weight and operation. Be sure box is located on the truck to provide safe weight distribution on the truck.

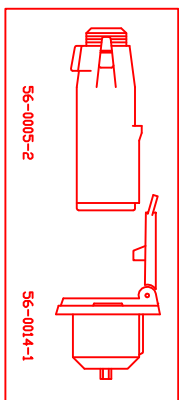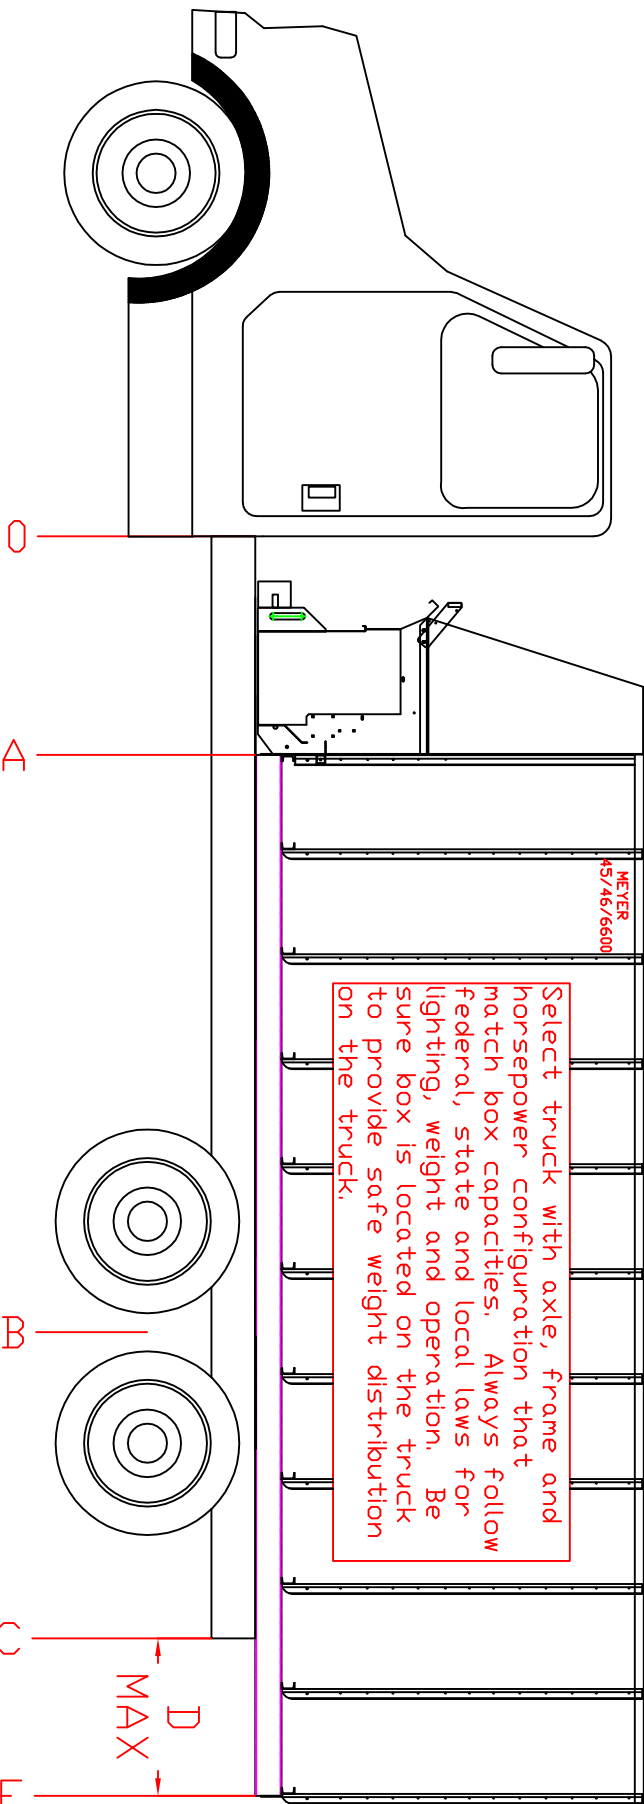

SUPPLY A 7-PIN MALE & FEMALE PLUG OFF THE REAR OF CAB FOR LIGHT HOOK-UP TO IMPLEMENT, LOCATED CENTRALLY BEHIND CAB. FROM MEYER ORDER 56-0005-2 & 56-0014-1.

TAILLIGHT CONVERTER
 DEPENDING ON MAKE AND MODEL OF TRUCK IT MAY BE NECESSARY TO INSTALL A LIGHT CONVERTER (MEYER PART #56-0028). CONVERTER ALLOWS SIGNAL LIGHTS AND BRAKE LIGHTS TO OPERATE ACCORDING TO DOT LIGHTING.

SIZE	A	B	C	D	E
45/46/6618	50"	170"	228"	38"	266"
46/6620	50"	182"	252"	38"	290"
46/6622	50"	194"	276"	38"	314"
6624	50"	206"	300"	38"	338"

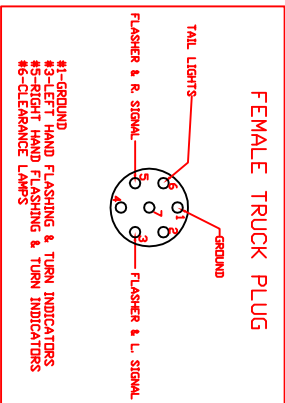

TOLERANCE UNLESS OTHERWISE SPECIFIED	MEYER MFG. CORP.
FINISH	UNLOAD MOUNT DIMENSIONS
SCALE	DWG. BY JAA APPROVED BY
DATE 6/22/2009	DWG. NO. 45/46/6600 TRUCK MOUNT